




AMERICAN BEARING MFG.CORP.

28,575 mm x 72,626 mm x 24,257 mm KOYO
41125/41286 tapered roller bearings

Bearing No. 41125/41286

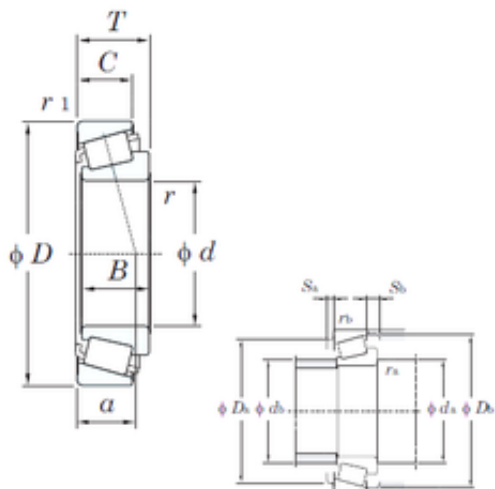

41125/41286 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|-------------------------|
| Size | 28.575x72.626x24.608 mm |
| Bore Diameter | 28,575 mm |
| Outer Diameter | 72,626 mm |
| Width | 24,608 mm |
| d | 28,575 mm |
| D | 72,626 mm |
| T | 24,608 mm |
| B | 24,257 mm |
| C | 17,462 mm |
| a | 20,7 mm |
| r min. | 4,8 mm |
| r2 min. | 1,6 mm |
| da min. | 48 mm |
| Da | 61 mm |
| db min | 36,5 mm |
| ra max. | 4,8 mm |
| rb max. | 1,6 mm |
| Db | 68 mm |
| Weight | 0,469 Kg |
| Basic dynamic load rating (C) | 61,8 kN |
| Basic static load rating (C0) | 60,5 kN |
| (Grease) Lubrication Speed | 6100 r/min |
| (Oil) Lubrication Speed | 8100 r/min |
| Calculation factor (e) | 0,6 |
| Calculation factor (Y0) | 0,55 |



AMERICAN BEARING MFG.CORP.