




AMERICAN BEARING MFG.CORP.

125 mm x 175 mm x 25,4 mm NSK JL725346/JL725316 tapered roller bearings

Bearing No. JL725346/JL725316

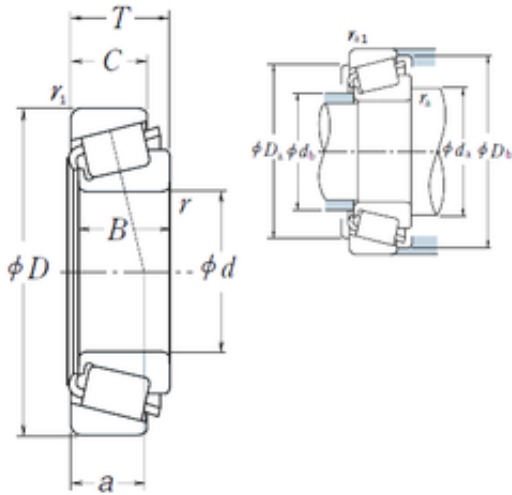

JL725346/JL725316 Bearing 2D drawings and 3D CAD models

Size	125x175x25.4 mm
Bore Diameter	125 mm
Outer Diameter	175 mm
Width	25,4 mm
d	125 mm
D	175 mm
T	25,4 mm
B	25,4 mm
C	18,288 mm
ra1 max.	3,3 mm
a	34,3 mm
r min.	3,3 mm
r1 min.	3,3 mm
Da	161 mm
db	133 mm
ra max.	3,3 mm
da	138 mm
Db	168 mm
Weight	1,763 Kg
Basic dynamic load rating (C)	134 kN
Basic static load rating (C0)	232 kN
(Grease) Lubrication Speed	1800 r/min
(Oil) Lubrication Speed	2400 r/min
Calculation factor (e)	0,48
Calculation factor (Y0)	0,69



AMERICAN BEARING MFG.CORP.

LangID	1
ALP23	0
outer r	3.3
ALP22	12
D_	175
ALP21	35
SHOG_yobi	JL725346R/JL725316R
RAr	271.697
inner r	3.3
GRS rpm	1800
D_b	168
D_a	161
DE_	159.371
SLR	16.5
Prod_Type3	TRBSR_ID_A
BETA_	1
ALPHA_	17.6
SDM_	148.691
DA1	11.459
DA2	10.765
hidYobi	JL725346/JL725316
Y1	1.3
B_	25.4
Oil rpm	2400
hidTable	ecat_NSTPRI
Y0	0.69
inner ra	3.3
outer rb	3.3
C0	232
CUP	0.573
e	0.48
DA_	11.114



AMERICAN BEARING MFG.CORP.

BET21	2
BET22	25
BET23	0
Z_	35
C_	18.288
yobi	JL725346/JL725316
KBRG	3141
CONE	1.19
DI_	71.16