




# AMERICAN BEARING MFG.CORP.

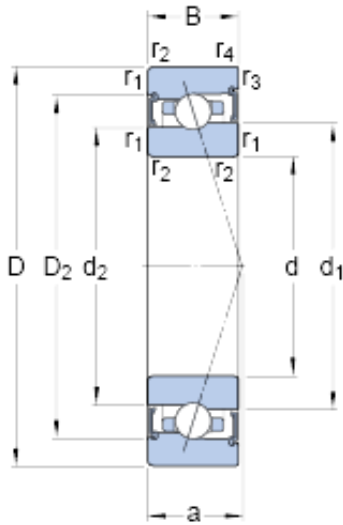

## 80 mm x 110 mm x 16 mm SKF S71916 ACB/HCP4A angular contact ball bearings

Bearing No. S71916 ACB/HCP4A

S71916 ACB/HCP4A Bearing 2D drawings and 3D CAD models

Size	110x80x16 mm
Bore Diameter	110 mm
Outer Diameter	80 mm
Width	16 mm
d	80 mm
D	110 mm
B	16 mm
d <sub>1</sub>	90.7 mm
d <sub>2</sub>	89.2 mm
D <sub>2</sub>	102.2 mm
r <sub>1,2</sub> - min.	1 mm
r <sub>3,4</sub> - min.	0.6 mm
a	35.1 mm
d <sub>a</sub> - min.	84.6 mm
d <sub>a</sub> - max.	90.1 mm
d <sub>b</sub> - min.	84.6 mm
d <sub>b</sub> - max.	88.6 mm
D <sub>a</sub> - max.	105 mm
D <sub>b</sub> - max.	106.8 mm
r <sub>a</sub> - max.	1 mm
r <sub>b</sub> - max.	0.6 mm
Basic dynamic load rating - C	14.8 kN
Basic static load rating - C <sub>0</sub>	14 kN
Fatigue load limit - P <sub>u</sub>	0.585 kN



## AMERICAN BEARING MFG.CORP.

Limiting speed for grease lubrication	17000 r/min
Ball - $D_w$	6.747 mm
Ball - z	34
Calculation factor - e	0.68
Calculation factor - $Y_2$	0.87
Calculation factor - $Y_0$	0.38
Calculation factor - $X_2$	0.41
Calculation factor - $Y_1$	0.92
Calculation factor - $Y_2$	1.41
Calculation factor - $Y_0$	0.76
Calculation factor - $X_2$	0.67
Preload class A - $G_A$	87 N
Preload class B - $G_B$	175 N
Preload class C - $G_C$	520 N
Calculation factor - f	1.13
Calculation factor - $f_1$	0.99
Calculation factor - $f_{2A}$	1
Calculation factor - $f_{2B}$	1.02
Calculation factor - $f_{2C}$	1.08
Calculation factor - $f_{HC}$	1.01
Preload class A	142 N/micron
Preload class B	182 N/micron
Preload class C	276 N/micron
$d_1$	90.7 mm
$d_2$	89.2 mm
$D_2$	102.2 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.6 mm
$d_a$ min.	84.6 mm



## AMERICAN BEARING MFG.CORP.

$d_a$ max.	90.1 mm
$d_b$ min.	84.6 mm
$d_b$ max.	88.6 mm
$D_a$ max.	105 mm
$D_b$ max.	106.8 mm
$r_a$ max.	1 mm
$r_b$ max.	0.6 mm
Basic dynamic load rating C	19.5 kN
Basic static load rating $C_0$	22.4 kN
Fatigue load limit $P_u$	0.585 kN
Attainable speed for grease lubrication	17000 r/min
Ball diameter $D_w$	6.747 mm
Number of balls z	34
Preload class A $G_A$	87 N
Static axial stiffness, preload class A	142 N/ $\mu$ m
Preload class B $G_B$	175 N
Static axial stiffness, preload class B	182 N/ $\mu$ m
Preload class C $G_C$	520 N
Static axial stiffness, preload class C	276 N/ $\mu$ m
Calculation factor f	1.13
Calculation factor $f_1$	0.99
Calculation factor $f_{2A}$	1
Calculation factor $f_{2B}$	1.02
Calculation factor $f_{2C}$	1.08
Calculation factor $f_{HC}$	1.01
Calculation factor e	0.68
Calculation factor (single, tandem) $Y_2$	0.87
Calculation factor (single, tandem) $Y_0$	0.38



## AMERICAN BEARING MFG.CORP.

Calculation factor (single, tandem) $X_2$	0.41
Calculation factor (back-to-back, face-to-face) $Y_1$	0.92
Calculation factor (back-to-back, face-to-face) $Y_2$	1.41
Calculation factor (back-to-back, face-to-face) $Y_0$	0.76
Calculation factor (back-to-back, face-to-face) $X_2$	0.67
Mass bearing	0.37 kg